
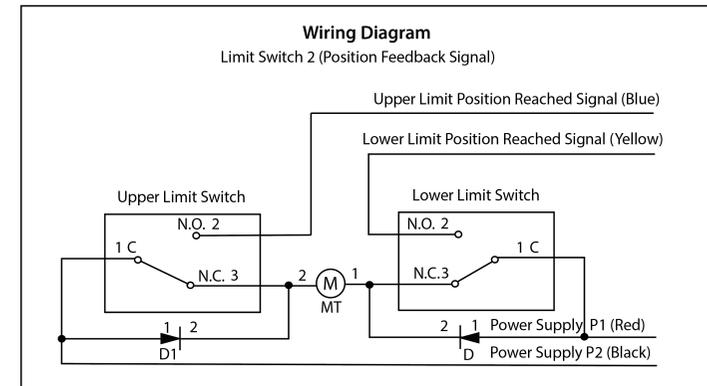
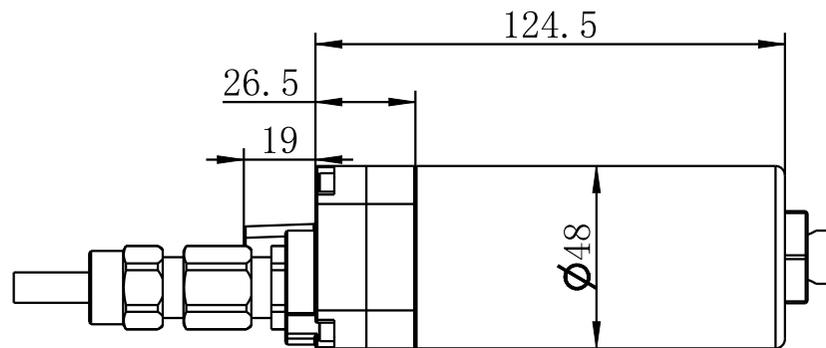
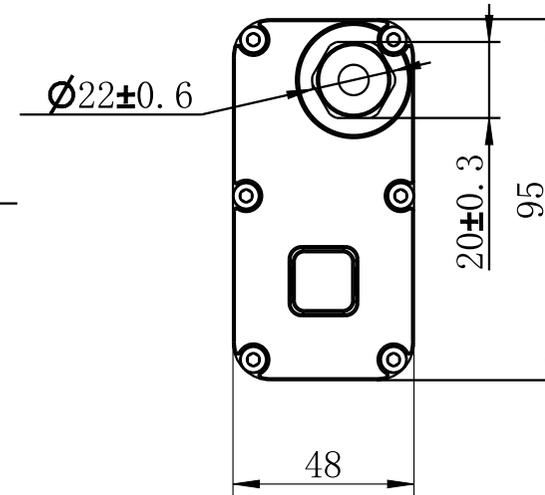


Code

Technical Parameters:

1. Actuator Rated Voltage 24VDC, Stroke: $20 \geq S \geq 300$ mm
2. Dynamic Load Capacity: 500N, Max. Load Speed: 7.5mm/s
3. Operating Temperature Range: -40°C to 60°C
4. Protection Rating: IP65
5. Corrosion Resistance Neutral Salt Spray Test: ≥ 96 Hours
6. Explosion-Proof IECEx Certification: Ex db IIC T4 Gb
7. Wiring: Red Wire - 24V, Black Wire 0V
8. Includes Anti-Rotate, Actuator is self-locking (no back drive under full rated force)

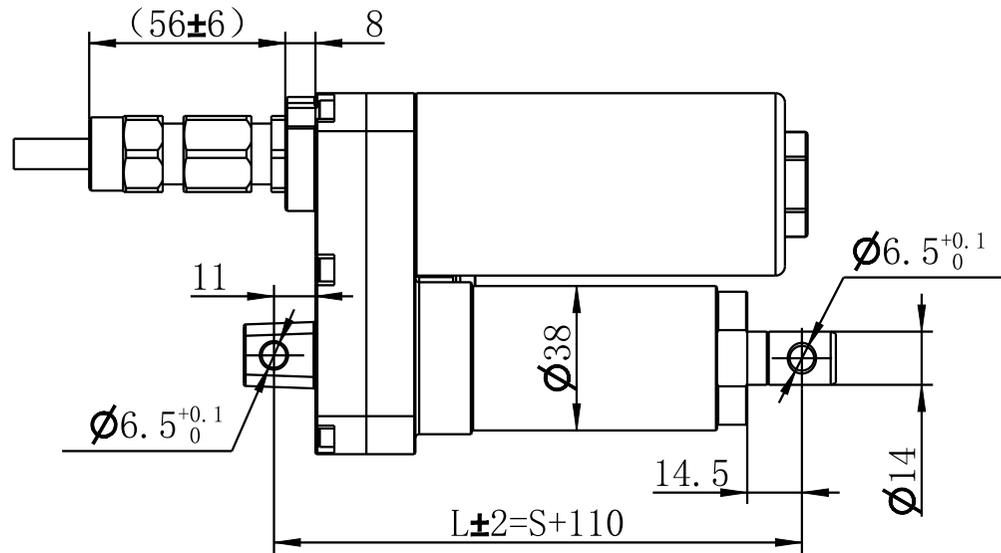

Mach Motion Products

Distributed in the United States by Mach Motion Products

| | | | | | | | | | | |
|------------|--|--------------|----------|----------|---|----|-------------------|-----|------|-------|
| Drawn | | 2024. 08. 22 | Drw Name | JC35FA17 | Zhejiang Jiechang Linear Motion Technology Co.,Ltd. | | | | | |
| Checked | | | Drw No. | | Unit | mm | Scale | 1:2 | Rev. | A |
| Technology | | | Material | | Weight | | Surface Treatment | | | |
| Approve | | | | | First Angle Projection | | Page | | | 1 / 1 |