


MLA-C Industrial Linear Actuator

2026 Catalog




• Glossary of Terms

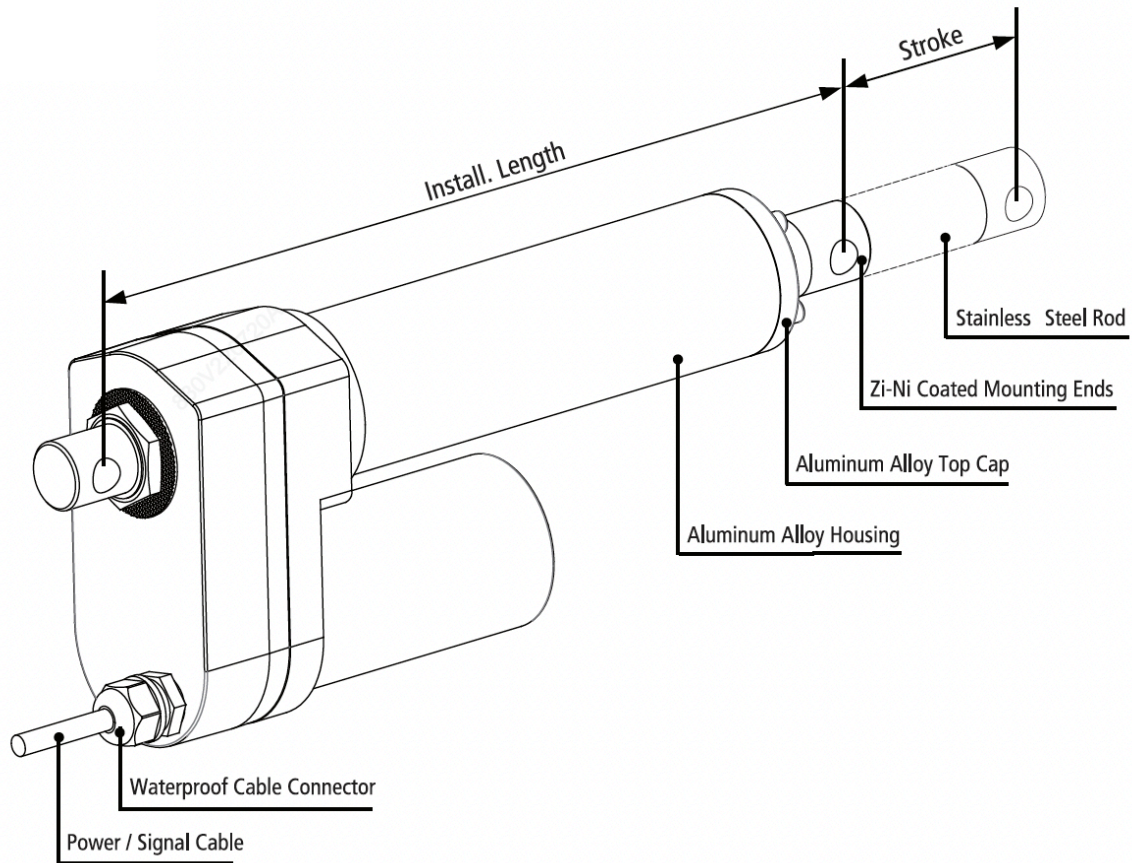

Stroke	How far the rod extends outwards from the body. The difference between fully extended length and fully retracted length. (Customizable)
Installation Length	The length of unit when fully closed. (Customizable)
Front Mounting End	Optional.
Rear Mounting End	Optional.
Dynamic Force	The max. force the actuator can carry while it is moving.
Self-locking	The max. force the actuator can hold when it is stopped.
Weather Protection	IPXX. The first digit: Dust Protection. The Second Digit: Liquids Protection. Please refer to [Table 1.]
Duty Cycle	Continuous working time "a", rest time "b". Duty Cycle is $a/(a+b) \times 100\%$. Please refer to [Table 1.]
Speed	Includes free-load speed and full load speed.
Manual Override	Can be used to extend or retract the actuator when there is no power in an emergency situation. Check [Table 1] for availability.

• General Specifications

Color	<input type="checkbox"/> Silver	<input checked="" type="checkbox"/> Black	<input type="checkbox"/> Custom						
Lead Screw	<input checked="" type="checkbox"/> Acme Screw	<input type="checkbox"/> Ball Screw							
Operation Mode	<input checked="" type="checkbox"/> Electrical	<input type="checkbox"/> Electrical + Manual							
Application	<input checked="" type="checkbox"/> Industrial	<input type="checkbox"/> Furniture	<input type="checkbox"/> Medical						
Operational Temp.	<input type="checkbox"/> 5°C to 40°C	<input checked="" type="checkbox"/> -10°C to 65°C	<input checked="" type="checkbox"/> -40°C to 65°C						
Operating Noise	<input type="checkbox"/> ≤45dB	<input type="checkbox"/> ≤50dB	<input checked="" type="checkbox"/> ≤65dB						
Stroke Range	<input checked="" type="checkbox"/> 50 to 600mm	<input checked="" type="checkbox"/> 600 to 1,000mm							
Dynamic Load	<input type="checkbox"/> ≤1,200N	<input type="checkbox"/> ≤2,000N	<input type="checkbox"/> ≤4,000N				<input checked="" type="checkbox"/> ≤10,000N	<input type="checkbox"/> ≤12,000N	<input type="checkbox"/> ≤20,000N
Duty Cycle	<input type="checkbox"/> 10%	<input type="checkbox"/> 20%	<input checked="" type="checkbox"/> 25%*				<input type="checkbox"/> ≤50%	<input type="checkbox"/> 100%	
Motor Type	<input checked="" type="checkbox"/> Brushed DC	<input type="checkbox"/> Stepper Motor	<input type="checkbox"/> Brushless				<input type="checkbox"/> Servo Motor		
Overload Protection	<input type="checkbox"/> None	<input checked="" type="checkbox"/> Clutch	<input type="checkbox"/> Electronic	<input checked="" type="checkbox"/> Thermistor					
Weather Protection	<input type="checkbox"/> IP20	<input type="checkbox"/> IP43	<input type="checkbox"/> IP54	<input type="checkbox"/> IP65	<input checked="" type="checkbox"/> IP66 / IP69K				
Position Feedback	<input checked="" type="checkbox"/> None	<input checked="" type="checkbox"/> Endstop Signal	<input checked="" type="checkbox"/> Hall Sensor	<input checked="" type="checkbox"/> Potentiometer	<input type="checkbox"/> Encoder	<input type="checkbox"/> Reed Switches			
Input Voltage	<input checked="" type="checkbox"/> 12VDC	<input checked="" type="checkbox"/> 24VDC	<input checked="" type="checkbox"/> 36VDC	<input checked="" type="checkbox"/> 48VDC	<input type="checkbox"/> 110VAC	<input type="checkbox"/> 220VAC			

*Note: Do not exceed 4 minutes continuous working at full load at 20°C.

[Table 1]

Options for MLA-C

Available Other Models

• Technical Parameters

Code	Screw Type	Max. Dynamic Load (*See Note 2)	Max. Self-Locking Load	Reduction Ratio	Pitch (mm)	Speed +/-10% (mm/sec) (*See Note 1)		Max. Stroke No Limit Switch or Pot. (*See Note 3)	Max. Stroke with Limit Switch or Pot. (*See Note 4)
		(N)	(N)			Free Load	Full Load	(mm)	(mm)
A	ACME Screw	7,000	10,000	40:1	3.17	5.5	4.0	1,000	380
B		7,000	10,000	40:1	5.0	8.5	7.0	1,000	610
C		5,000	7,000	20:1	3.17	11.0	9.5	1,000	380
D		4,000	5,500	20:1	5.0	17.0	14.0	1,000	610
E		3,000	4,000	10:1	3.17	22.0	18.0	1,000	380
F		2,000	2,800	10:1	5.0	35.0	28.5	1,000	610
G	Ball Screw	10,000	11,000	40:1	5.0	8.5	6.5	1,000	610
H		7,000	8,500	20:1	5.0	17.0	13.5	1,000	610
I		3,500	4,500	10:1	5.0	35.0	27.0	1,000	610





[Table 2]

*Notes:


1. Measurements are made with actuators in connection with stable power supplies and ambient temperature of 20°C.
2. For example, when real load is 5,000N, choosing code "C" is recommended. You can also choose "A" or "B," each of which come with an increased load buffer, higher safety factors, and extended product service time.
3. Many factors affect the "Customizable Maximum Stroke," such as load, speed, and direction of force. Actual application scenarios should be considered. Please contact cs@machmo.com if your required parameters are not listed.
4. Potentiometer is not optional.

• Performance

Current vs. Load

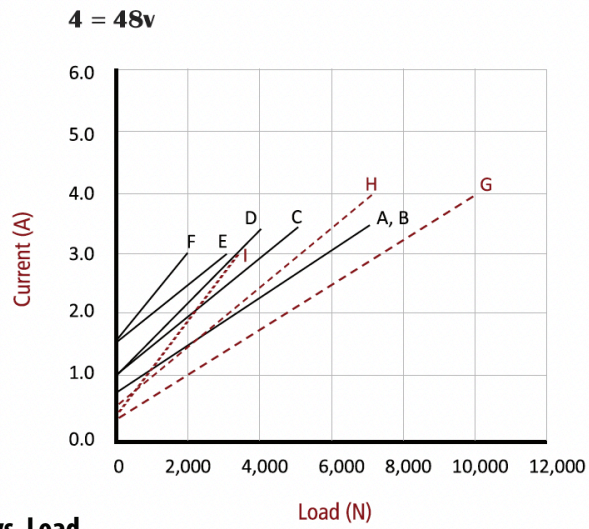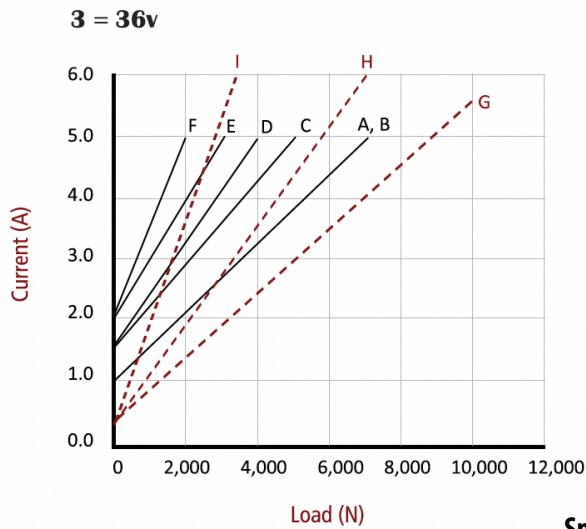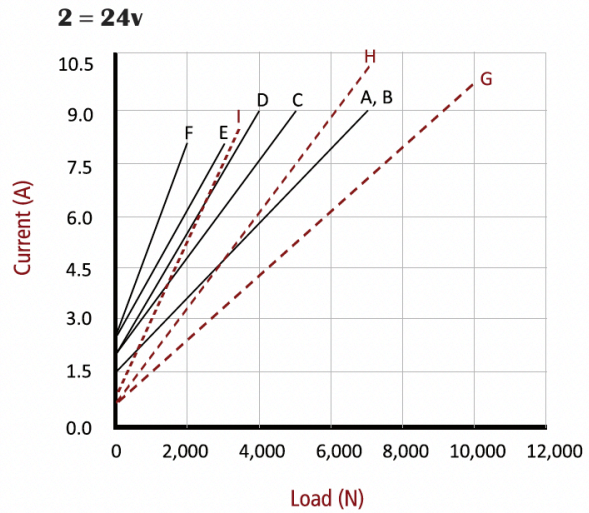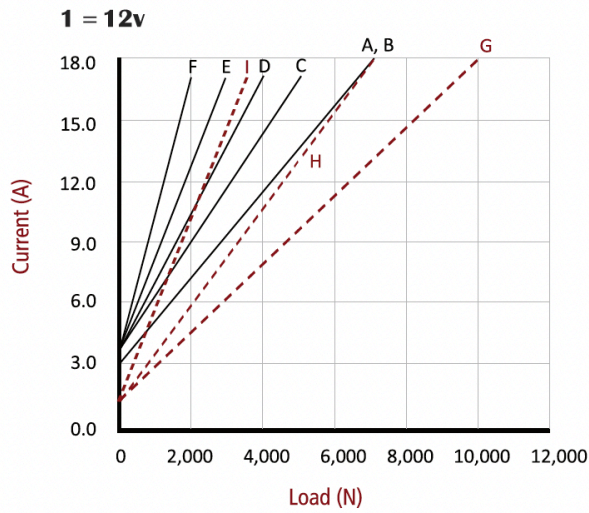


Speed vs. Load

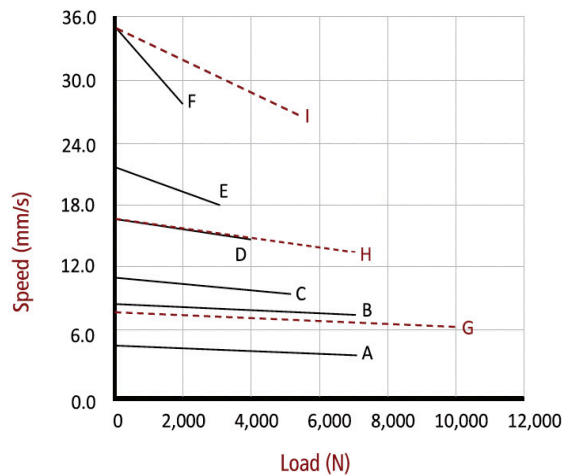


* Note: Measurements are made with Actuators in Connection with Stable Power Supplies and Ambient Temperature of 20°C.

•Front Mounting End


1. Please contact cs@machmo.com if none of the options below meet your requirements.




F01




F02

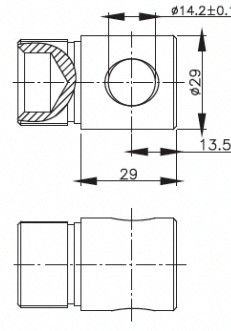


F03




F04

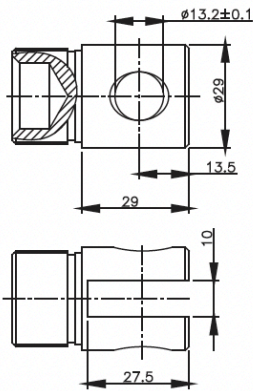


F05

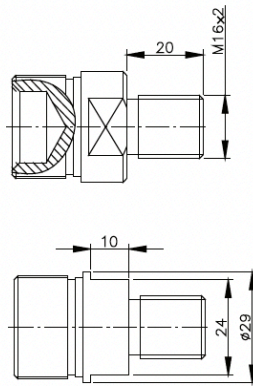


F06

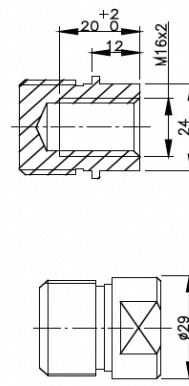

F07




F08

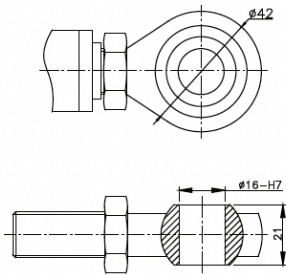


F09

2. Start of Installation Length

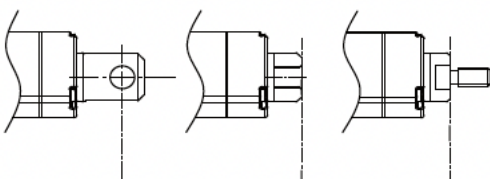

3. Hole Directions

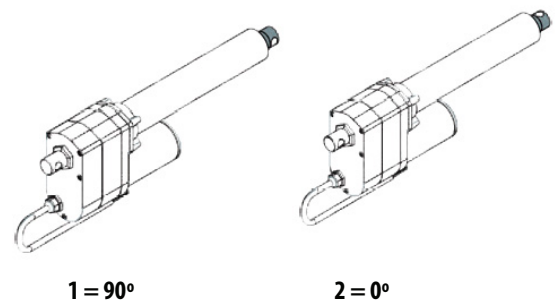


1 = 90°


2 = 0°

• Rear Mounting End


1. Please contact cs@machmo.com if none of the options below meet your requirements.

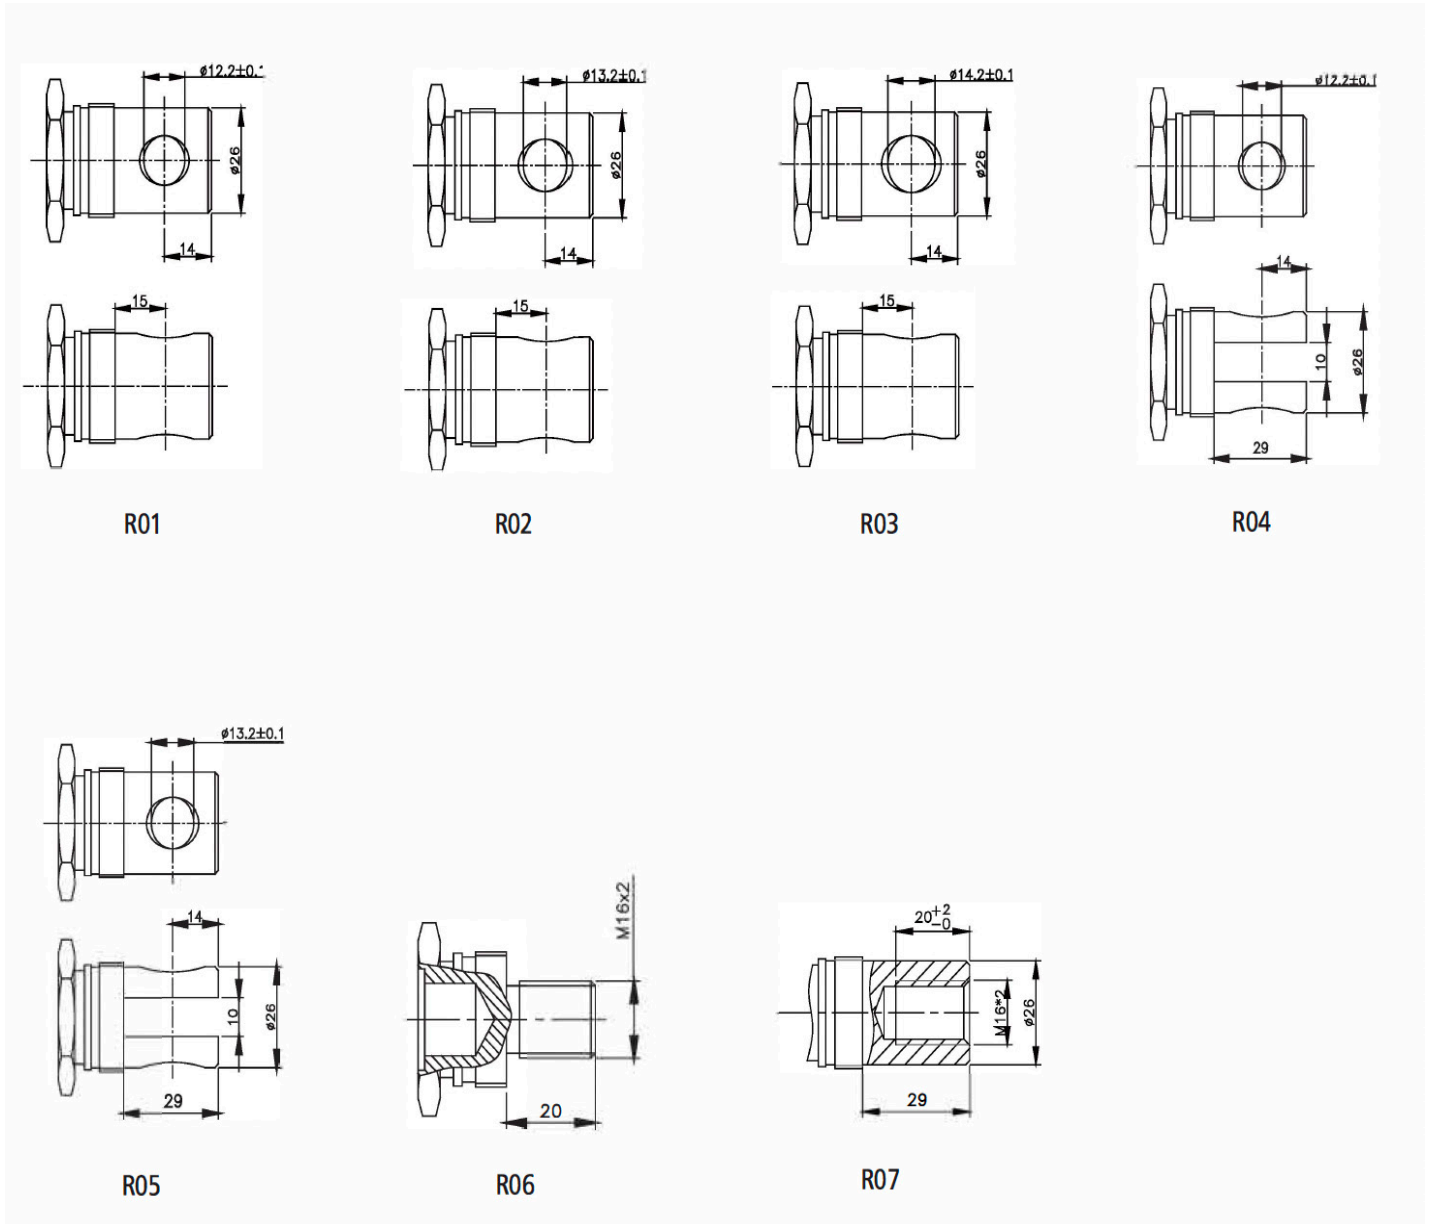

2. End of Installation Length

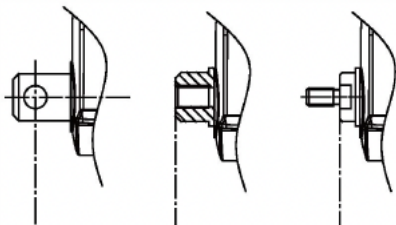


3. Hole Directions

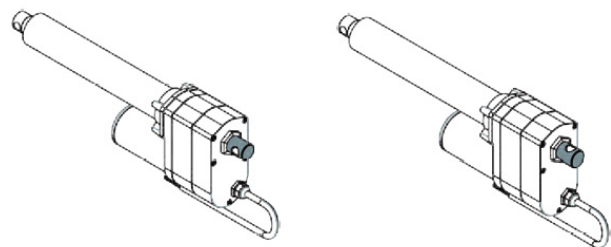

1 = 90°

2 = 0°

• Product Dimensions - Integrated Limit Switches

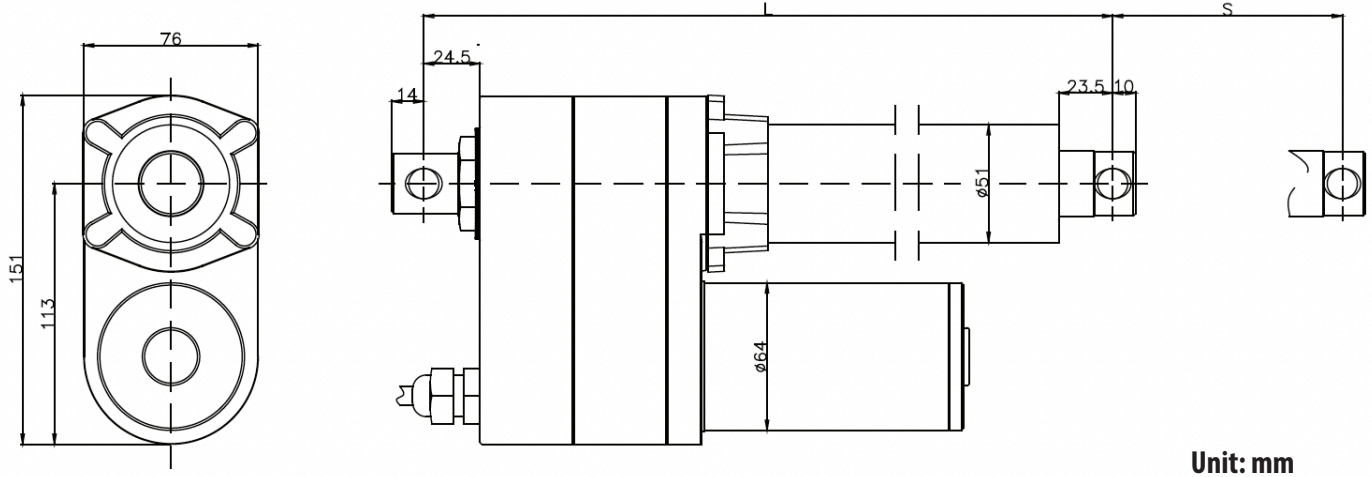

Unit: mm

A. Mounting Ends VS. Installation Length

Front Mounting Ends	Rear Mounting Ends
	R01, R02, R03, R04, R05, R06, R07
F01, F02, F03, F04, F05, F06, F07	$A \geq S + 250\text{mm}$
F08, F09	$A \geq S + 300\text{mm}$

[Table 3]

B. Stroke VS. Installation Length

Stroke (S) (mm)	Installation Length (L) (mm)
50 - 399	+ 0
400 - 610	+ 50

[Table 4]

How to Calculate "Installation Length":


$S = \text{Stroke}$, $L = \text{Installation Length}$
 $L \geq A + B$

Example:

Front Mount	Rear Mount	S (mm)	A (mm)	B (mm)	$L \geq A + B$ (mm)
F08	R01	300	$300 + 300$	+0	≥ 600

[Table 5]

• Product Dimensions - Without Limit Switches

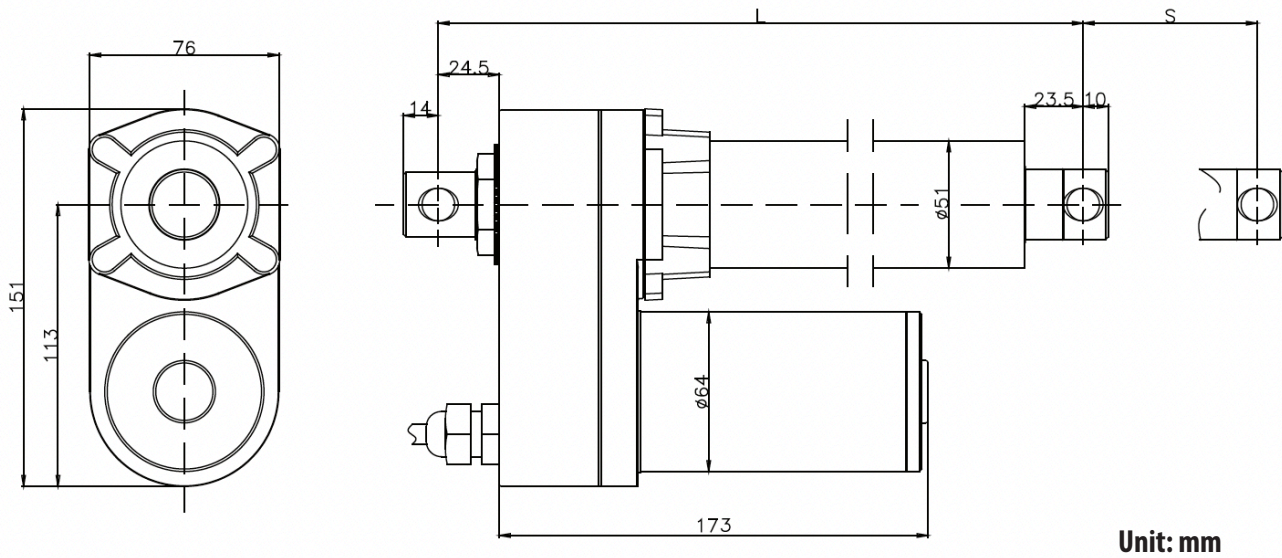

Unit: mm

A. Mounting Ends VS. Installation Length

Front Mounting Ends	Rear Mounting Ends
	R01, R02, R03, R04, R05, R06, R07
F01, F02, F03, F04, F05, F06, F07	$A \geq S + 200\text{mm}$
F08, F09	$A \geq S + 250\text{mm}$

[Table 6]

B. Stroke VS. Installation Length

Stroke (S) (mm)	Installation Length (L) (mm)
50 - 399	+ 0
≥ 400	+ 50

[Table 7]

How to Calculate "Installation Length":

$S = \text{Stroke}, L = \text{Installation Length}$
 $L \geq A + B$

Example:


Front Mount	Rear Mount	S (mm)	A (mm)	B (mm)	$L \geq A + B$ (mm)
F08	R01	300	$300 + 250$	+0	≥ 550

[Table 8]

• **Signal Feedback**

0. Standard Limit Switches Without Signal Feedback

Standard MLA-33 comes with limit switches that automatically shut off motor at the end of travel path.

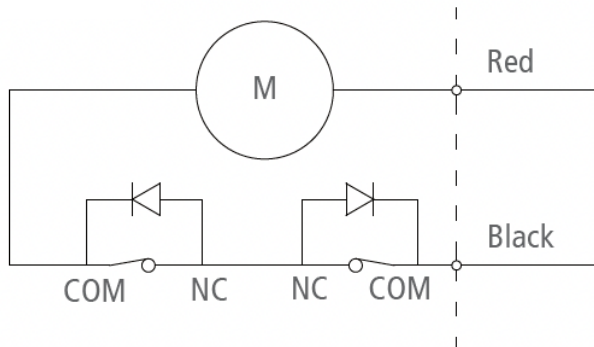


Wire Type		
	Black	Red
Extend	-	+
Retract	+	-

[Table 9]

1. Endstop Signal

The actuator can be equipped with endstop signal output, but it will not auto-stop at either end of travel.

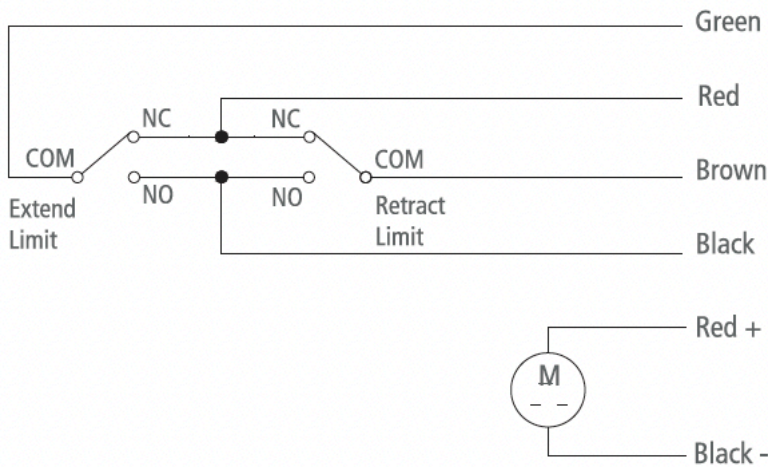



Wire Type		
	Black	Red
Extend	-	+
Retract	+	-

Wire Type	
Black	Extend or Retract Limit, N.O.
Red	Extend or Retract Limit, N.C.
Green	Extend Limit, COM.
Brown	Retract Limit, COM.

[Table 10]

2. Hall Effect Sensor

Standard Dual-Sensor

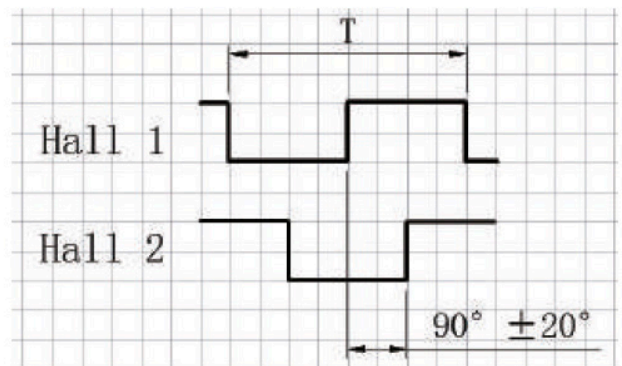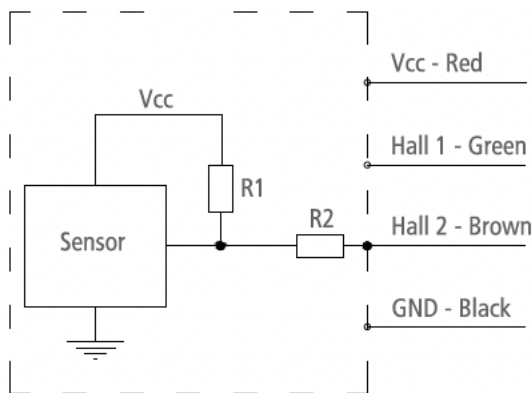

* Note: Power Supply (V) = 5 ~ 15V

• Signal Feedback

2. Hall Effect Sensor (Continued)

Standard Dual-sensor

Code	Pulse Equivalent per Sensor (pulse/mm)		
A	1 Pole Pair	4 Pole Pairs (Standard)	12.60
B			8.00
C			6.30
D			4.00
E			3.20
F			2.00
			50.47
			32.00
			25.24
			16.00
			12.62
			8.00

[Table 11]



3. Potentiometer

Starting Value 0.5 ±0.1KΩ

Code	Maximum Stroke	Resistance Value per mm
A, C, E	380mm	0.0250KΩ
B, D, F	610mm	0.0159KΩ

[Table 12]

Signal Wiring Diagram

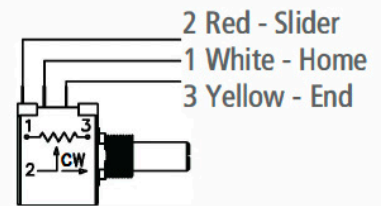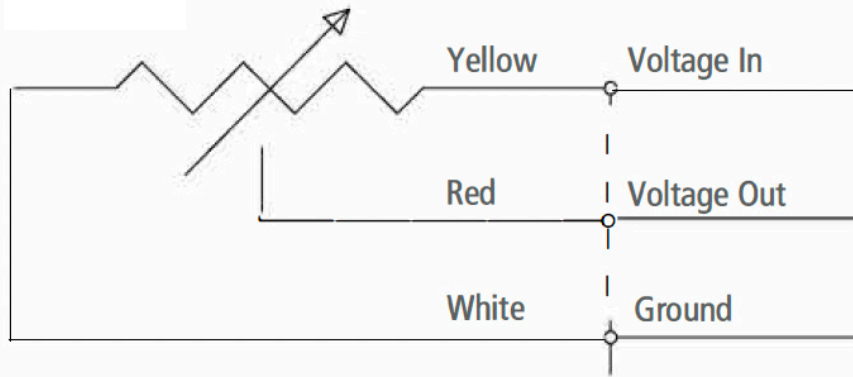

Connect 1+2, resistance value increase, actuator extend.

• Product Inquiry Table

Selection	Specification	Available Options			
<input type="text"/>	Voltage	1 = 12V	2 = 24V	3 = 36V	4 = 48V
<input type="text"/>	Load and Speed	See [Table 2]			
<input type="text"/>	Stroke (mm)	Please contact cs@machmo.com if required stroke is out of range.			
<input type="text"/>	Installation Length (mm)	See [Tables 3-8]			
<input type="text"/>	Front Mounting End	F01 - F09		or FX = Custom	
<input type="text"/>	Rear Mounting End	R01 - R07		or RX = Custom	
<input type="text"/>	Mounting Hole Direction	Front 1 = 90°	Front 2 = 0°	Rear 1 = 90°	Rear 2 = 0°
<input type="text"/>	Signal Feedback	0 = None	1 = Endstop Signal	2 = Hall Sensor	3 = Potentiometer
<input type="text"/>	Cable Length	1 = 400mm	2 = 1,000mm	3 = 2,000mm	X = Custom
<input type="text"/>	Connector	0 = Tinned Bare Wires	1 = Go with KZ Control	X = Custom	
<input type="text"/>	Working Temperature	1 = -10°C ~ 65°C		2 = -40°C ~ 65°C	
<input type="text"/>	Working Frequency	Estimated Work Cycles Per Day			
<input type="text"/>	End Use	Indoor or Outdoor?			

Application