
MLA-33P-24-152-362-22-0

Mach Motion Products

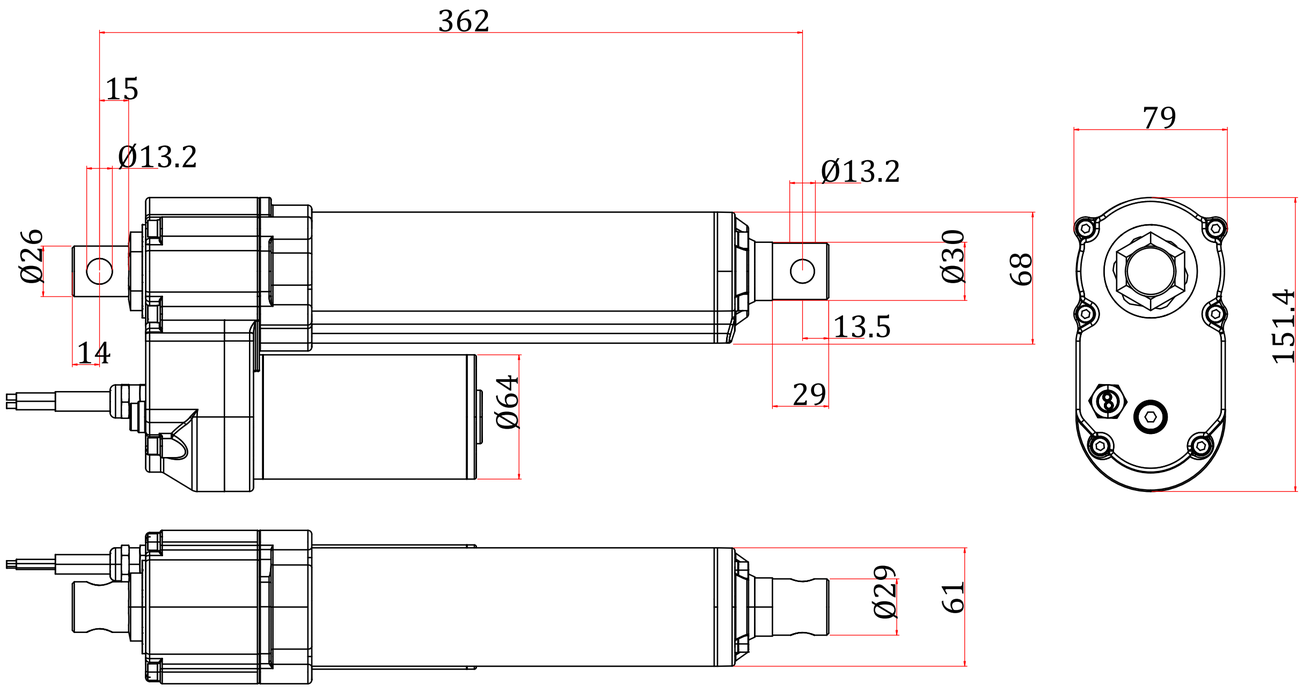

Specifications		
1	Product Series	MLA-33P
2	Voltage	24V DC
3	Dynamic Load	3000N
4	Static Load	5000N
5	Stroke	152±5mm
6	Installation Distance	362±5mm
7	Full Load Speed	18mm/s±10%
8	No-Load speed	22mm/s±10%
9	Front End	ø13.2 Slotless Thru-Hole
10	Front Hole Direction	90°
11	Rear End	ø13.2 Slotless Thru-Hole
12	End Hole Direction	90°
13	Limit Switches	Built-in, Not Adjustable
14	Signal Feedback	None
15	Power Cord Definition	Extend: Blk -, Red +,Retract: Blk +, Red -
16	Signal Line Definition	None
17	Cable Length	500mm±10%
18	Cable Connector	Tinned Bare Wire
19	Protection Level	IP65
20	Duty Cycle	25% Continuous, ≤ 4min
21	Operating Temperature	-10°C - 65°C
22	No-Load Current	≤2.5 Amp

Unit	MM	Proportion	1 : 1				
						Drawing NO:	24032254
					MLA-33P-24-152-362-22-0		